


# Introduction to Antennas

*Dr. Sandra Cruz-Pol*  
Electrical and Computer Engineering  
University of Puerto Rico at Mayaguez

## What is an antenna?


- An antenna is a passive structure that serves as transition between a transmission line and air used to transmit and/or receive electromagnetic waves.



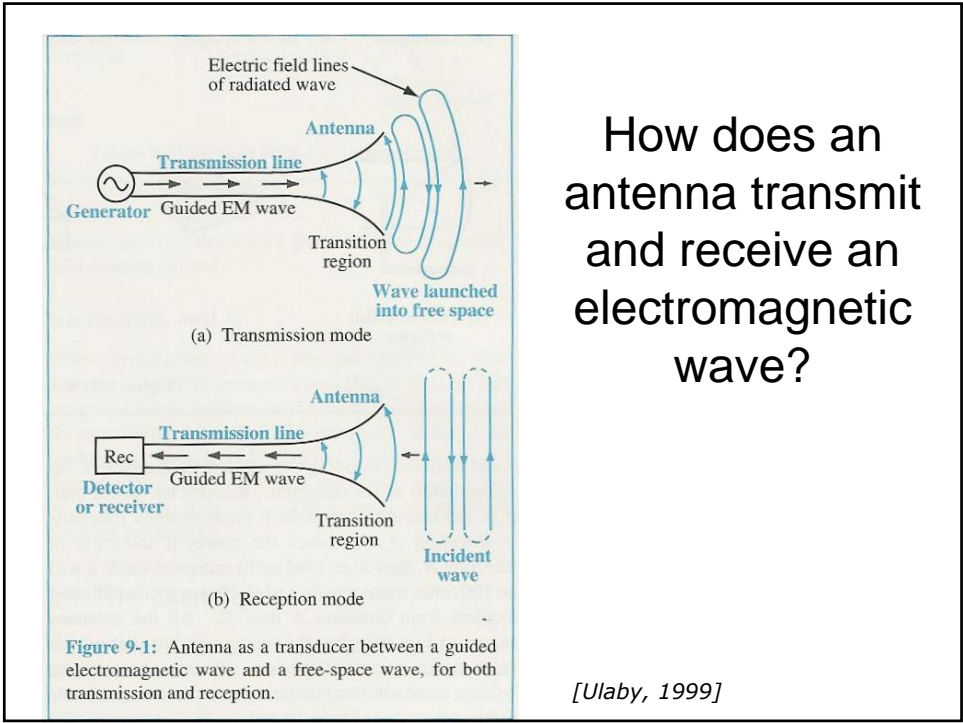



## Types of antennas

- Can be divided into two groups
  - **Wire** antennas:
    - dipoles, loops, Yagi-Uda...
  - **Aperture** antennas:
    - parabolic, horns, microstrip antennas...




<http://www.kyes.com/antenna/antennatypes/antennatypes.html>  
[http://en.wikipedia.org/wiki/Antenna\\_\(electronics\)#Overview](http://en.wikipedia.org/wiki/Antenna_(electronics)#Overview)

Wire antennas


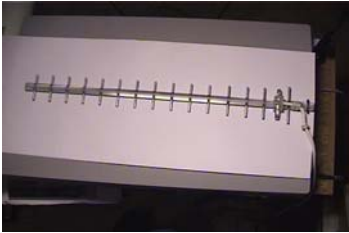


Log periodic

Yagi

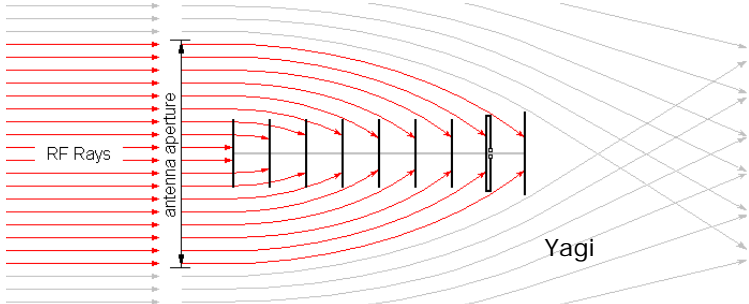


Wire antennas

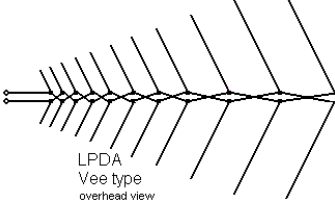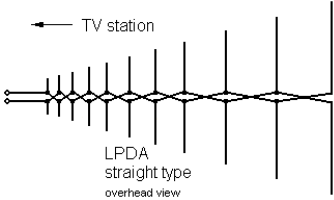

LPDA straight type overhead view

LPDA Vee type overhead view

Log periodic

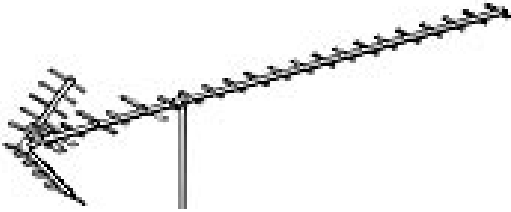


Yagi-Uda with reflector

# Aperture antennas





Spherical (main reflector) with Gregorian feed

Dipole with parabolic and corner reflector

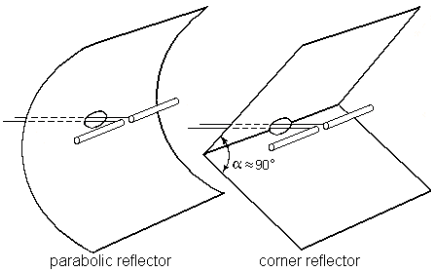

# Reflector and Pyramidal horn antennas




# Related parameters

- Solid angle,  $\Omega_A$  and Radiation intensity,  $U$
- Radiation pattern,  $P_n$ , sidelobes, HPBW
- Far field zone,  $r_{ff}$
- Directivity,  $D$  or Gain,  $G$
- Antenna radiation impedance,  $R_{rad}$
- Effective Area,  $A_e$


All of these parameters are expressed in terms of a **transmission** antenna, but are identically applicable to a **receiving** antenna. We'll also study:

- Friis Transmission Equation
- Radar Equation


# Spherical coordinates

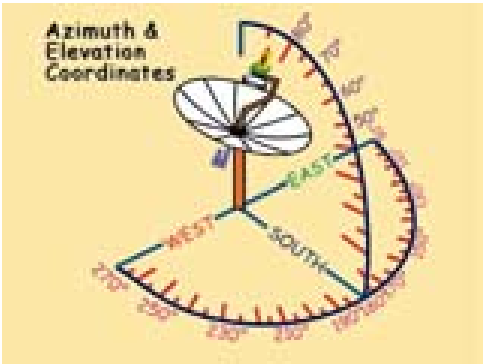


$\phi$ = azimuth  
 $\theta$ = elevation

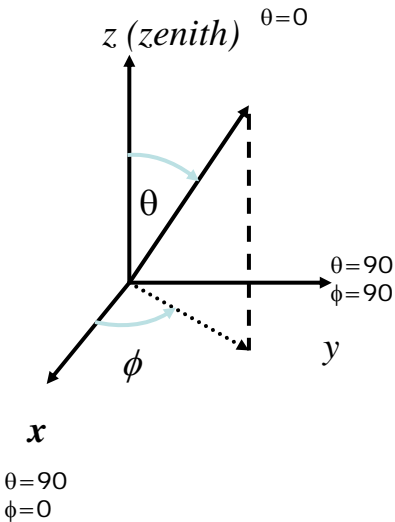

### Solid Angle



Circle

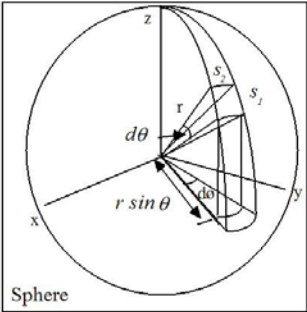

Sphere

$s = \theta r = \text{arco}$

$\theta = \text{ángulo plano}$

- El arco total en un círculo:  
 $= 2\pi r$
- Angulo total:  $= 2\pi$  [radianes]

$s_1 = r d\theta \quad s_2 = r \sin \theta d\phi$   
 $dA = s_1 s_2$   
 $dA = r^2 \sin \theta d\theta d\phi$   
 $= r^2 d\Omega$

$d\Omega = \text{elemento de ángulo sólido}$

- El área total en una esfera:  
 $= 4\pi r^2$
- Angulo sólido total:  $= 4\pi$  [rad<sup>2</sup>]  
 $= 4\pi$  [sr]

**1 steradian (sr) = (1 radian)<sup>2</sup>**

### Radiation Intensity


- Is the **power density per solid angle**:

$$U = r^2 P_r \quad [\text{W/sr}]$$

where


$$P_r = \frac{1}{2} \text{Re}\{E \times H^*\} \cdot \hat{r} \quad [\text{W/m}^2]$$

is the power density also known as Poynting vector.

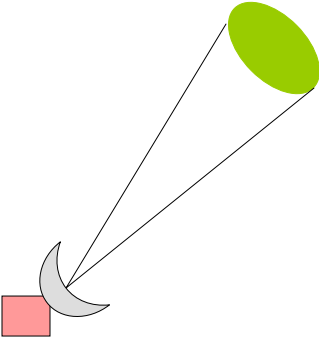

# Total radiated power by antenna

- Can be calculated as;




$$P_{rad} = \int U \cdot d\Omega \text{ [W]}$$

or

$$P_{rad} = \int \mathcal{P}_r \cdot dS \text{ [W]}$$

## Radiation Pattern



- Radiation pattern is the 3D plot of the gain, but usually the 2D horizontal and vertical cross sections of the radiation pattern are considered.

Field pattern:

$$E_n(\theta, \phi) = \frac{E(\theta, \phi)}{E_{\max}(\theta, \phi)}$$

Power pattern:

- Refers to the variation of the relative amplitude of the radiation as a function of **direction**.


$$F_n(\theta, \phi) = \frac{\mathcal{P}(\theta, \phi)}{\mathcal{P}_{\max}(\theta, \phi)} = \frac{U(\theta, \phi)}{U_{\max}(\theta, \phi)}$$

Where  $U$  is the radiation intensity to be defined later.

# Total Solid Angle of an antenna

$$\Omega_A = \iint_{4\pi} F_n(\theta, \phi) d\Omega \quad [\text{sr}]$$

Is as if you changed the **radiation pattern beam** of an antenna into a **pencil beam shape** and find out what's the equivalent solid angle occupied by this pattern.

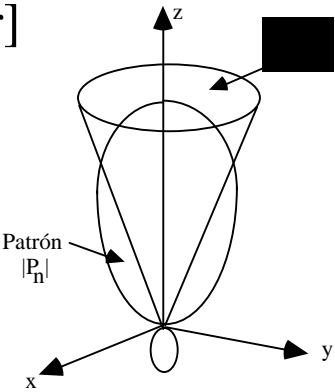

# Isotropic antenna

- It's an hypothetic antenna, i.e., it does not exist in real life, yet it's used as a measuring bar for real antenna characteristics.
- It's a point source that occupies a negligible space. Has no directional preference.
- Its pattern is simply a sphere so it has  $\Omega_A = \Omega_{\text{isotropic}} = 4\pi$  [steradians].


$$\Omega_{\text{isotropic}} = \iint_{4\pi} (1) d\Omega$$

$$\int_{\theta=0}^{\pi} \int_{\phi=0}^{2\pi} (1) \sin \theta d\theta d\phi = 4\pi$$




# Radiation Pattern

- Whenever we speak of radiation patterns, we normally mean we are at a distance far enough from the antenna known as the **far field**.



Patrón de Campo  
(Escala lineal)




Patrón de campo o de potencia  
(Escala logarítmica)

COORDENADAS RECTANGULARES


Note that when plotted in decibels, the power and field patterns look exactly the same.

# Pattern – polar plot

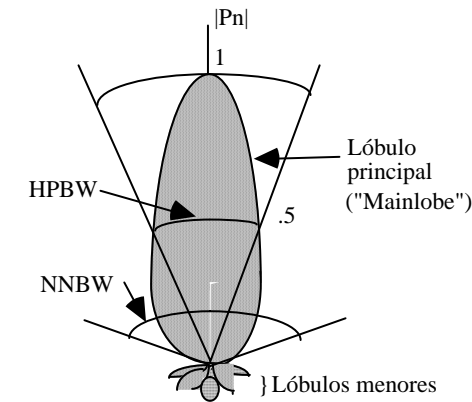

PATRON TIPICO  
(Coordenadas polares esféricas, 2 dimensiones)

## Dipole antenna pattern

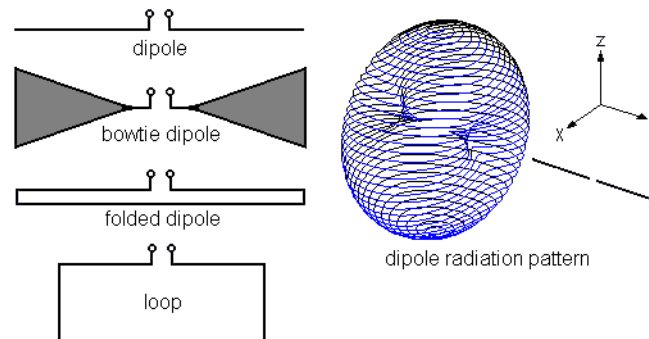


Note the radiation pattern is donut shaped.


## Sidelobes

- Antennas sometimes show **side lobes** in the radiation pattern.
- Side lobes are peaks in gain other than the main lobe (the "beam").
- Side lobes have bad impact to the antenna quality whenever the system is being used to determine the direction of a signal, for example in RADAR systems.

# Sidelobes of dipole arrays

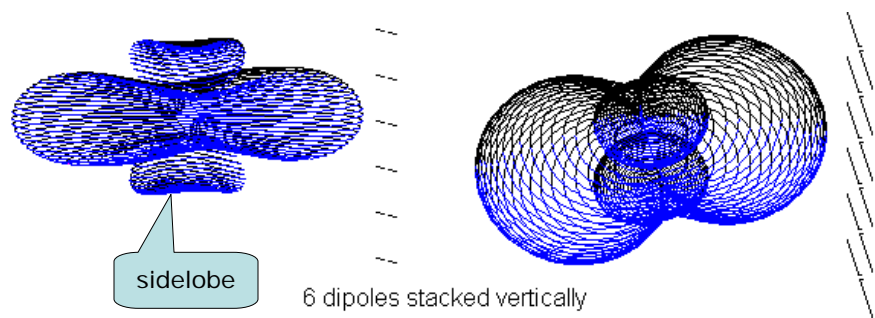


# Antenna Pattern with sidelobes

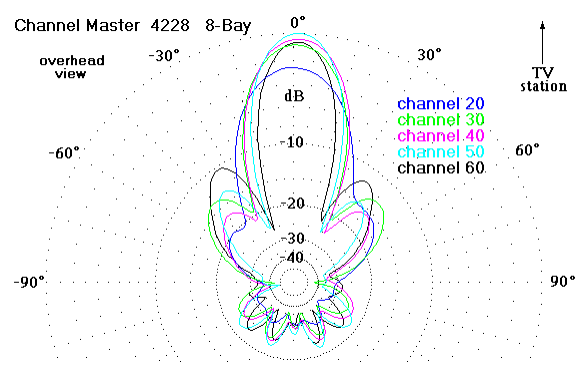

Many applications require sidelobe levels (SLL) to be below -20dB.

# Gain or Directivity

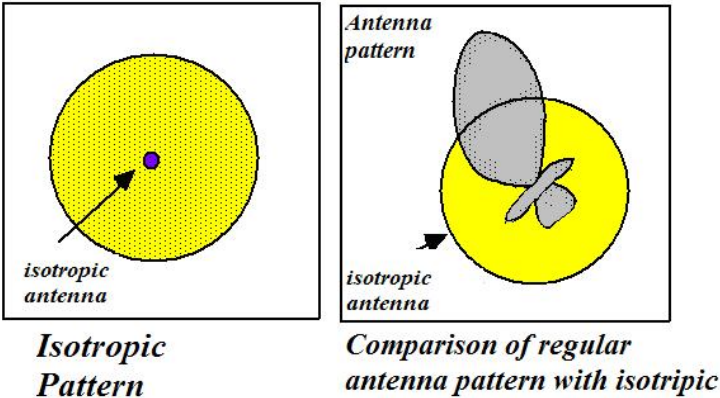

An isotropic antenna and a practical antenna fed with the same power. Their patters would compare as in the figure on the right.

# Directivity and Gain

- All practical antennas radiate more than the isotropic antenna in some directions and less in others.
- Gain is inherently directional; the gain of an antenna is **usually measured in the direction which it radiates best.**

$$D = D_{\max}(\theta, \phi) = \mathcal{P}_{\max} / \mathcal{P}_{ave} = U_{\max} / U_{ave}$$

If lossless antenna,  $G=D$


# Gain or Directivity

- Gain is measured by comparing an antenna to a model antenna, typically the isotropic antenna which radiates equally in all directions.

$$D(\theta,\phi) = \mathcal{P} / \mathcal{P}_{AVE} = \frac{\mathcal{P}(\theta,\phi)}{1/A \iint \mathcal{P} dA} = \frac{4\pi r^2 \mathcal{P}(\theta,\phi)}{P_{rad}}$$
$$D_o = \frac{4\pi U_{max}}{P_{rad}} = 4\pi/\Omega_A = \Omega_{isotropic}/\Omega_A$$

# Directivity

- For an antenna with a single main lobe pointing in the z-direction ,  $\Omega_A$  can be approximated to the product of the HPBW

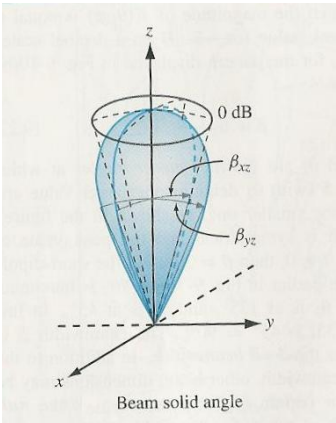

The Directivity:

## Far field

- The distance at which the fields transmitted by an antenna (spherical) can be approximated to plane waves.
- It's defined as

$D$  = is the largest physical dimension of the antenna


$\lambda$  = wavelength of operation

$r_{ff}$  = distance from the antenna to the observation point

## Beamwidth, HPBW

- Is the “distance” in radians or degrees between the direction of the radiation pattern where the radiated power is half of the maximum.

# Antenna Impedance

- An antenna is “seen” by the generator as a load with impedance  $Z_A$ , connected to the line.
- **The real part is the radiation resistance plus the ohmic resistance.**
  - Minimizing impedance differences at each interface will reduce SWR and maximize power transfer through each part of the antenna system.
  - Complex impedance,  $Z_A$ , of an antenna is related to the electrical length of the antenna at the wavelength in use.
    - The impedance of an antenna can be matched to the feed line and radio by adjusting the impedance of the feed line, using the feed line as an impedance transformer.
    - More commonly, the impedance is adjusted at the load (see below) with an antenna tuner, a balun, a matching transformer, matching networks composed of inductors and capacitors, or matching sections such as the gamma match.

# Antenna efficiency, $\eta$

- Efficiency is the ratio of power put into the antenna terminals to the power actually radiated
  - Radiation in an antenna is caused by radiation resistance which can only be measured as part of total resistance including loss resistance.
- $$G = \eta D$$

## Radiation Resistance

- The antenna is connected to a T.L., and it “sees” it as an impedance.
- The power radiated is
- The loss power is

$$\eta = \frac{P_{\text{rad}}}{P_{\text{rad}} + P_{\text{loss}}} = \frac{R_{\text{rad}}}{R_{\text{rad}} + R_{\text{loss}}}$$

## Radar equation

- What is a radar?
- Received power by a radar is

$$P_r = \frac{P_t G_o^2 \lambda_o^2}{(4\pi)^3 R^4} \sigma e^{-2\tau}$$

- Where  $\sigma$  is the backscattering coefficient of the target [m<sup>2</sup>]





## APPLICATIONS

- Mention application to CASA, and other ongoing research.
- Show results from undergrads working in NASA and NSF projects
- Relation to Grad students

## Antenna polarization



- The polarization of an antenna is the polarization of the signals it emits.
  - The ionosphere changes the polarization of signals unpredictably, so for signals which will be reflected by the ionosphere, polarization is not crucial.
  - However, for line-of-sight communications, it can make a tremendous difference in signal quality to have the transmitter and receiver using the same polarization.
  - Polarizations commonly considered are *vertical*, *horizontal*, and circular.

## Antenna Bandwidth



- The **bandwidth** of an antenna is the range of frequencies over which it is effective, usually centered around the operating or resonant frequency.
  - The bandwidth of an antenna may be increased by several techniques, including using thicker wires, replacing wires with cages to simulate a thicker wire, tapering antenna components (like in a **feed horn**), and combining multiple antennas into a single assembly and allowing the natural impedance to select the correct antenna.

## Effective Area

- How a Rx antenna extracts energy from incident wave and delivers it to a load?

Above is valid for any antenna under matched-load conditions

## Friis Transmission Eq.

- In any communication link, there is a transmitting antenna and a receiver with a receiver antenna.



$$P_{rec} = \frac{G_t G_r P_t \lambda^2}{(4\pi R)^2}$$

## Antenna Arrays

- Uses many antennas synchronized with each other to increase
- Pattern multiplication

# Example

- Determine the direction of maximum radiation , pattern solid angle, directivity and HPBW in the  $y$ - $z$  plane for an antenna with normalized radiation intensity given by

$$F(\theta,\phi)=\begin{cases} \cos^2 \theta & \text{for } 0 \leq \theta \leq \frac{\pi}{2} \text{ and } 0 \leq \phi \leq 2\pi \\ 0 & \text{elsewhere} \end{cases}$$

